

A-Series S

Compact Air Curtain for visible horizontal installation


The A-Series is Teddington's compact Air Curtain model with CORRIGO® air discharge system. The narrow housing dimensions and simple installation ensure that the Air Curtains can be quickly installed above the door. Compared to conventional Air Curtain systems, they also achieve significantly higher energy efficiency and noticeably improve comfort in the entrance area.

Application

The horizontal Air Curtain of the A-Series housing type S is the classic solution for effective separation of indoor and outdoor air. With its frontal air intake, it can be installed either directly above the door or up to the maximum recommended installation height.

Teddington works

As an Air Curtain specialist, Teddington has developed CORRIGO®, an air discharge system that enables optimum adaptation to the given entrance situation. Teddington Air Curtains with the CORRIGO® air discharge system achieve noticeably better room comfort and significantly better screening compared to conventional lamella units.

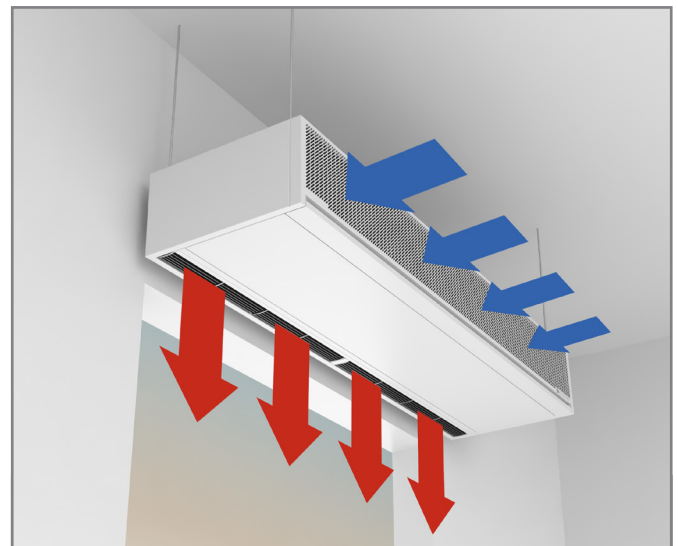

Housing type S

Horizontal visible installation,
air intake at the front.



VARIOUS OPTIONS

Heating modes



The Teddington A-Series is available as an ambient unit without heating and can be heated in the versions LTHW (water) and electric.

3 power levels



The Teddington A-Series S is available in three power levels. This means that your Air Curtain is configured precisely for the respective requirement in order to guarantee optimum shielding and the lowest possible energy consumption.

Air Discharge range up to 3.0 m



Our powerful and fast-starting A-Series fans, in conjunction with our CORRIGO® air discharge system allow a maximum installation height of up to 3.0 metres.

AC or EC fans



A distinction is made between two fan technologies: AC and EC. Teddington is one of the few Air Curtain manufacturers to offer both technologies. This allows us to respond flexibly to project requirements and offer the optimal unit.

AC: The fast-starting AC fans are particularly suitable for doors and gates that open and close quickly or are only open for a short time.

EC: The energy-saving and infinitely variable EC fans are particularly suitable for doors and gates that are open for long periods (e.g. open glass front of a shop).

TSC 3-E / TSC 5 controller— Intuitive and user-friendly

With their 3- or 5-stage electronic air volume control for setting the operating parameters and LEDs for displaying the operating status, the TSC 3-E / TSC 5 control units ensure convenient control of your Air Curtain system.

- High process reliability
- Perfect integration
- Simple, intuitive operation
- Solid workmanship






TECHNICAL DATA

Power level	Length of the unit (cm)	A-Series 1					A-Series 2					A-Series 3				
		100**	150	200	250	300	100**	150	200	250	300	100	150	200	250	300
Performance data																
Max. recommended installation height	[m]	2.30					2.60					3.00				
Max. air volume	[m³/h]	1700	1800	2550	3450	4100	1700	2600	3450	4300	5200	2550	3400	4950	5950	6950
Average air discharge speed*	[m/s]	8					10					10.5				
Sound pressure level at a distance of 3 metres to the sound source (anechoic chamber)																
Max. operating level	[dB(A)]	57.0	56.0	58.0	59.0	60.0	57.0	58.0	59.0	60.0	62.0	58.0	59.0	60.0	61.0	63.0
Standard operating level	[dB(A)]	50.5	49.5	50.5	51.5	52.5	50.5	51.5	52.5	53.5	55.5	51.5	52.5	53.5	54.5	56.5
Minimum operating level	[dB(A)]	40.5	39.5	40.5	41.5	42.5	40.5	41.5	42.5	43.5	45.5	41.5	42.5	43.5	44.5	46.5

* Data are based on measurements in accordance with ISO 27327 conducted by the Institute of Air Handling and Refrigeration (ILK) in Dresden

** The A-Series 1-100 and A-Series 2-100 units are identical and differ only in the heat output of the electric heating coil

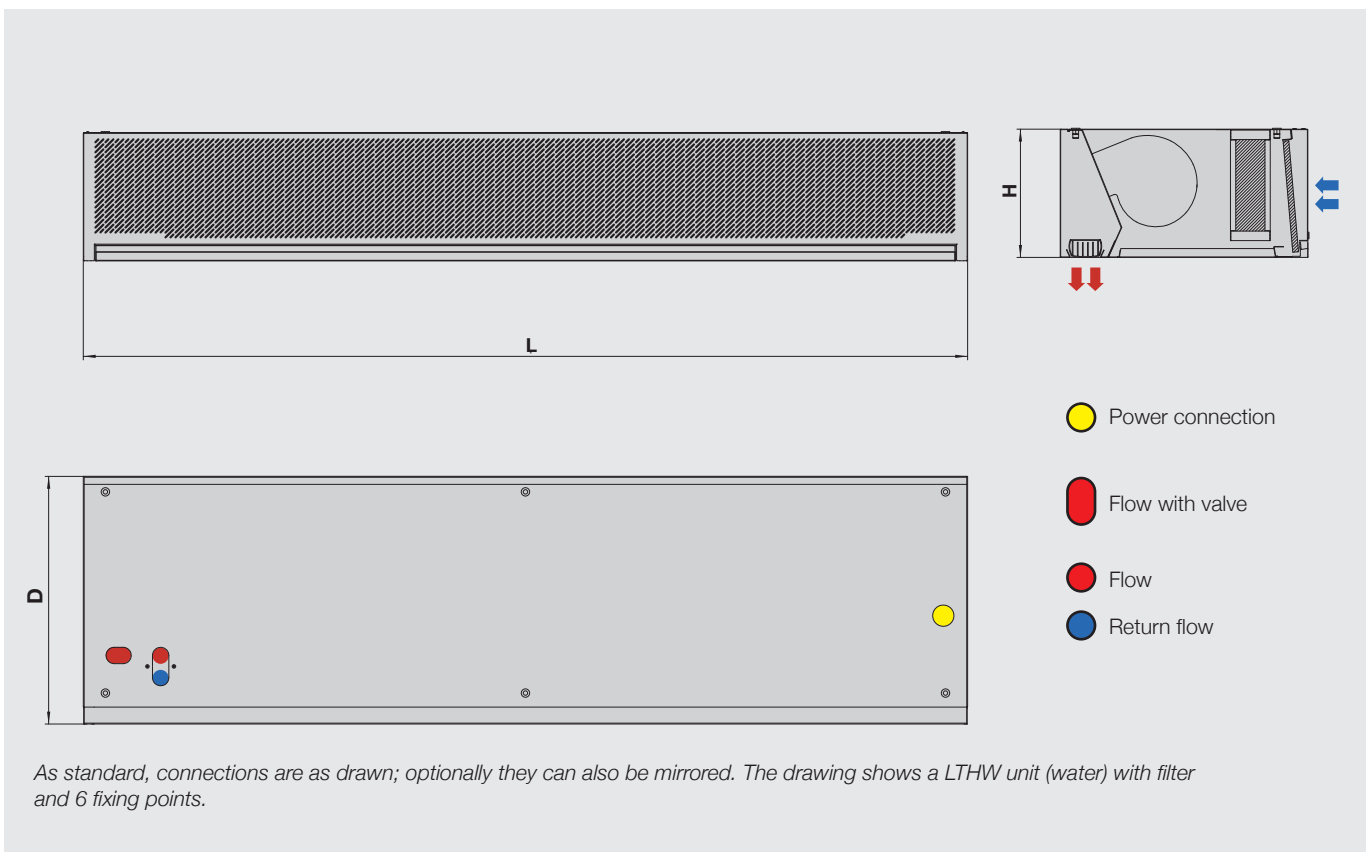


Power level	Length of the unit (cm)	A-Series 1					A-Series 2					A-Series 3					
		100**	150	200	250	300	100**	150	200	250	300	100	150	200	250	300	
Measurements																	
Length	L	[mm]	1000	1500	2000	2500	3000	1000	1500	2000	2500	3000	1000	1500	2000	2500	3000
Height	H	[mm]	290	290	290	290	290	290	290	290	290	290	290	290	290	290	290
Depth	D	[mm]	560	560	560	560	560	560	560	560	560	560	560	560	560	560	
Weight without heater battery		[kg]	41	53	69	86	102	41	57	73	90	106	41	61	77	94	110
Weight with heater battery		[kg]	46	61	80	99	118	46	65	84	103	122	46	69	88	107	126
Fixing Points		[pcs.]	4	4	4	6	6	4	4	4	6	6	4	4	4	6	6




TECHNICAL DATA

	Power level	A-Series 1					A-Series 2					A-Series 3				
	Length of the unit (cm)	100**	150	200	250	300	100**	150	200	250	300	100	150	200	250	300
Technical data of fans (230 V)																
AC technology																
Output	[kW]	0.37	0.37	0.56	0.74	0.93	0.37	0.56	0.74	0.93	1.11	0.56	0.74	0.93	1.11	1.30
Power consumption	[A]	1.70	1.70	2.55	3.40	4.25	1.70	2.55	3.40	4.25	5.10	2.55	3.40	4.25	5.10	5.95
EC technology																
Output	[kW]	0.34	0.34	0.51	0.68	0.85	0.34	0.51	0.68	0.85	1.01	0.51	0.68	0.85	1.01	1.19
Power consumption	[A]	2.70	2.70	4.05	5.40	6.75	2.70	4.05	5.40	6.75	8.10	4.05	5.40	6.75	8.10	9.45

	Power level	A-Series 1					A-Series 2					A-Series 3				
	Length of the unit (cm)	100**	150	200	250	300	100**	150	200	250	300	100	150	200	250	300
Technical data of LTHW heater battery																
Pipe connections																
Flow / Return flow	[inch]	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
LTHW 70/50 at an air intake temperature of 20°C and air discharge temperature of 32°C																
Heat output	[kW]	7.2	7.7	11.0	15.0	17.7	7.2	11.4	13.8	17.8	22.3	11.2	14.8	21.1	23.0	28.6
Flow rate	[m³/h]	0.30	0.30	0.50	0.70	0.80	0.30	0.50	0.60	0.80	1.00	0.50	0.70	0.90	1.00	1.30
Water resistance	[kPa]	0.86	0.50	0.70	1.19	1.90	0.80	0.90	1.17	1.60	2.88	1.80	1.50	2.47	2.60	4.50
LTHW 70/50 at an air intake temperature of 10°C and air discharge temperature of 32°C																
Heat output	[kW]	13.0	14.0	19.0	25.7	31.6	13.0	20.0	26.4	32.0	39.4	17.5	26.4	37.5	45.9	50.6
Flow rate	[m³/h]	0.60	0.60	0.80	1.10	1.40	0.60	0.90	1.20	1.40	1.70	0.80	1.20	1.60	2.00	2.20
Water resistance	[kPa]	2.40	1.30	2.00	3.10	5.30	2.40	2.50	3.66	4.48	7.80	4.08	4.10	6.80	8.40	12.17
LTHW 50/35 at an air intake temperature of 20°C and max. air discharge temperature (with low-temperature heat exchanger)																
Heat output	[kW]	7.4	11.1	16.8	22.0	26.6	7.4	14.7	21.2	26.0	31.9	10.1	17.8	27.5	33.0	39.4
Air discharge temperature	[°C]	32.8	38.0	39.3	38.7	39.0	32.8	36.5	37.9	37.7	37.9	31.6	35.4	36.3	36.0	36.6
Flow rate	[m³/h]	0.40	0.60	1.00	1.30	1.50	0.40	0.90	1.20	1.50	1.80	0.60	1.00	1.60	1.90	2.30
Water resistance	[kPa]	0.40	1.47	4.17	2.71	2.97	0.40	2.42	6.26	3.64	4.09	0.81	3.41	9.93	5.50	5.96

Ask our experts for data on your individual media temperatures.

	Power level	A-Series 1					A-Series 2					A-Series 3				
	Length of the unit (cm)	100**	150	200	250	300	100**	150	200	250	300	100	150	200	250	300
Technical data electrical heater battery																
Electrical heater battery (three-stage, 400V, 3 Ph, 50 Hz)																
Level 1	[kW]	3.0	4.5	6.0	8.0	9.0	4.0	6.0	8.0	9.0	12.0	5.0	7.5	10.0	12.0	12.0
Level 2	[kW]	6.0	9.0	12.0	16.0	18.0	8.0	12.0	16.0	18.0	24.0	10.0	15.0	20.0	24.0	24.0
Level 3	[kW]	9.0	13.5	18.0	24.0	27.0	12.0	18.0	24.0	27.0	36.0	15.0	22.5	30.0	36.0	36.0
Max dt.	[K]	14.8	18.6	19.7	19.4	18.5	19.7	19.4	19.4	17.5	19.4	16.4	18.5	16.9	16.9	14.5




Individual colours

Teddington Air Curtain systems are powder-coated to a high quality. Our units are manufactured in RAL 9016 Traffic White as standard. On request, you can choose from six timeless colours for a small surcharge. – Would you like a very special colour? Talk to us about your desired colour.



RAL 7011
Iron Grey




RAL 9005
Deep Black




RAL 9006
White Aluminium



RAL 9010
Pure White



Black grey metallic
Metallic fine structure / matt



DB 703
Dark Grey



Teddington Luftschleieranlagen GmbH
Industriepark Nord 42 • D-53567 Buchholz (Mendt)
Tel. +49 (2683) 9694-0 • info@teddington.de
www.teddington.de